


| Application


前装车载摄像头 | OEM & Auto-qualified Camera



| Features

支持4帧合成宽动态, 最大140dB
 Support 4-frame HDR, up to 140dB
 支持模拟高清输出和数字输出接口
 Support HD Analog & Digital output
 最大支持1280x960@30fps
 Support up to 1280x960@30fps

| Block Diagram

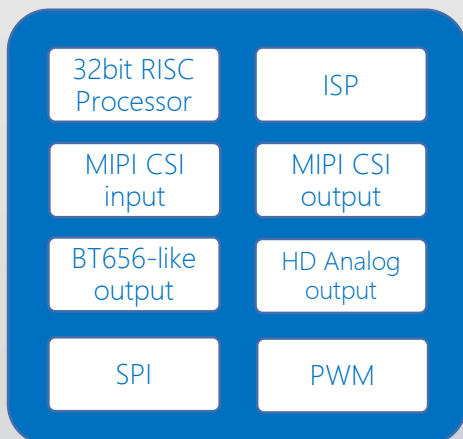

| Specifications

	Support up to 1280x960
CIS Input	Support up to 120fps (4-frame HDR)
	MIPI CSI-2
	10/12/14/16 bit raw data input
ISP	Support up to 4-frame HDR
	Lens shading compensation
	AE/AWB
OSD	Support GOSD
Video Output	HD-Analog output
	MIPI CSI-2 output
	BT656-like output, up to 1280x960@30fps
Peripherals	2xI2C, 1xSPI, 2xUART, GPIO
	2xSADC, 4xPWM
Package	QFN68, 7mmx7mm
Others	Working temperature: -40°C~105°C
	Typical power consumption: 230mw
	Power supply: Analog: 3.3v, IO: 3.3v/1.8v, Digital: 1.1v
Qualification	AEC-Q100 Grade 2 qualified

| Shanghai
 上海市徐汇区宜山路717号6楼
 717 Yishan Road, Block 2, Floor
 6, Xuhui District, Shanghai.
 Tel: +86 21 6112 1558,
 Fax: +86 21 6406 6786

| Shenzhen
 龙岗区天安云谷6栋东座1005-1007
 Room 1005-1007, Cloud Park
 Building 6 East.
 Longgang District, ShenZhen
 Tel: +86 0755 86255308

| Chengdu
 双流区双兴大道1号电子科大科技园B区6栋3层
 UESTC Campus, B, 6#, 3rd
 floor, Shuangliu,
 Chengdu
 Tel: +86 028 85783758

| Hangzhou
 杭州市滨江区西兴街道物联网街277号中胜大厦
 Wulianwang road 277,
 Zhongsheng Building,
 Binjiang, Hangzhou.
 Tel: +86 18001983519

sales@fullhan.com
 marketing@fullhan.com
 www.fullhan.com
 stock: 300613.sz

